


10 Watt Series





514 050 (Recessed Mount)
514 070 (Surface Mount)



- 01
 - 02
 - 03
 - 04
 - 05
 - 07
 - 08
 - 09
 - 11
- Frosted lens standard
 - Approved for blind hole applications
 - Optional Rotatable Anti-Glare Shield available
 - 10W lamp (Osram G4 Halogen lamp included and installed)



RECESSED MOUNT

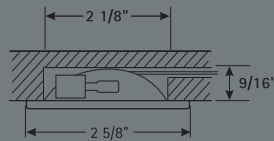

SURFACE MOUNT

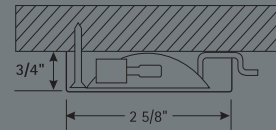


20 Watt Series





514 580 (Recessed Mount)
514 585 (Surface Mount)



- 01
 - 02
 - 04
 - 05
 - 09
 - 11
- Clear lens standard
 - Approved for blind hole applications
 - 24V available (consult factory)
 - Optional Rotatable Anti-Glare Shield available
 - 20W lamp (Osram G4 Halogen lamp included and installed)




RECESSED MOUNT

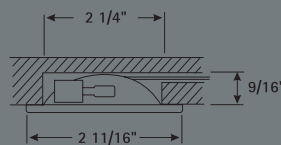

SURFACE MOUNT

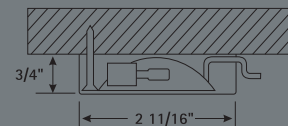

Project name	Type
Order number	
Date	


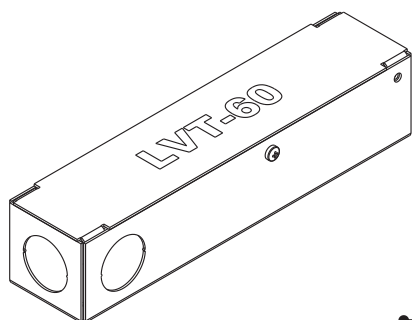


LVT-60 CLASS 2


MINI ELECTRONIC TRANSFORMER WITH ENCLOSURE

SPECIFICATIONS

- ◆ Approved by UL as Class 2 recognized component E193999
- ◆ Weight 10.5 ounces (300g)
- ◆ 50 °C max ambient temperature
- ◆ 90 °C max case temperature
- ◆ 120V 50/60Hz input, 0.5A
- ◆ 11.75Vac 40kHz output, 5A
- ◆ 60W max load
- ◆ 10W minimum load without dimmer
- ◆ 20W minimum load with dimmer
- ◆ 0.95 power factor
- ◆ Electronic internal resettable protection, patented auto heat regulation that also automatically acts as over load protection, auto-reset thermal cut-off @ 125 °C
- ◆ 2 year warranty on all electronic transformers

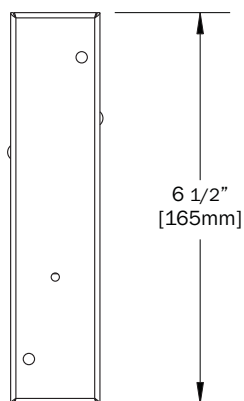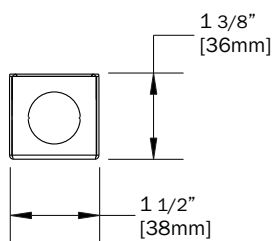

Output Voltage vs. Load at 120V

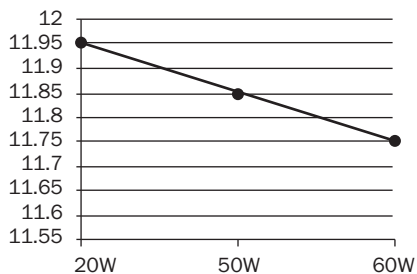

Output vs. Input at Max. Load

