

location: **WET** exterior
location: **DAMP** interior

SPECIFICATIONS:

DESCRIPTION

Wall-mounted sconces featuring handcrafted glasses.
9" sq. model (#8884) and 5" wide model (#8886) are ADA-compliant.

LAMPING

Standard is 60W or 75W A19 120V incandescent, suitable for dimming.
CFL: 4-Pin CFL with non-dimming electronic ballast.
Lamps not included.

DIFFUSER

Diffuser shall be handcrafted Opal Matte glass.

CONSTRUCTION

Stamped aluminum fitter is powder coated white.
Glass is secured by stainless steel set screws.

METAL FINISH

Decorative metal accents shall be in various finish options.

MOUNTING

Installs directly to a 4" octagonal outlet box. 75°C supply wire required for incandescent lamping. Centered on fixture, except 8886- fixture centerline is positioned 0.75" below box centerline.

LABELS

UL or ETL Listed. Suitable for Wet Locations (interior or exterior use).



For ordering information, see next page

All dimensions provided are nominal.
Allowance must be made for dimensional tolerance in handcrafted glasses.

REV 9/10

ORDERING:


Geo 5: #8886

8 | 8 | 8 | 6 | 0 | 7

Fixture/Decor

888607 8.5" H Opal Matte

- |
- Lamping Options**
- () 1x 60W A19 Incand.
 - D1** 1x 13W Quad 120V
 - M1** 1x 13W Quad 277V




Geo 9: #8884

8 | 8 | 8 | 4 | 0 | 7

Fixture/Decor

888407 9.0" Sq. Opal Matte

- |
- Lamping Options**
- () 1x 75W A19 Incand.
 - D1** 1x 13W Quad 120V
 - F1** 1x 18W TBX 120V
 - M1** 1x 13W Quad 277V
 - O1** 1x 18W TBX 277V




Geo 11: #8883

8 | 8 | 8 | 3 | 0 | 7

Fixture/Decor

888307 11.0" Sq. Opal Matte

- |
- Lamping Options**
- () 2x 60W A19 Incand.
 - D2** 2x 13W Quad 120V
 - E2** 2x 18W Quad 120V
 - F2** 2x 18W TBX 120V
 - I1** 1x 26W TBX 120V
 - K1** 1x 32W TBX 120V
 - M2** 2x 13W Quad 277V
 - N2** 2x 18W Quad 277V
 - O2** 2x 18W TBX 277V
 - R1** 1x 26W TBX 277V
 - T1** 1x 32W TBX 277V

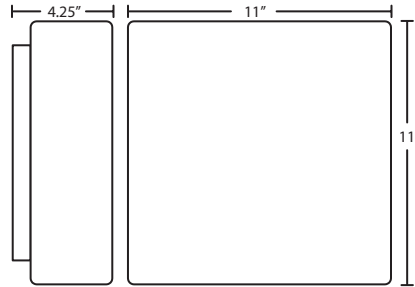

Project Information: